


BUILT-IN TALL-TUB DISHWASHER

D

Style of product may vary from picture

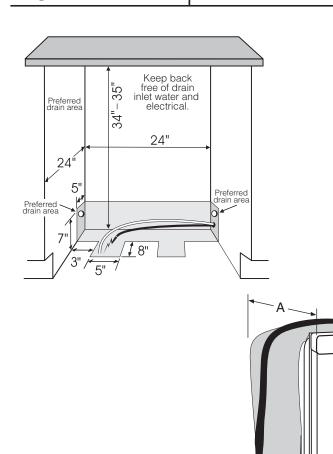

PRODUCT	DIMENSIONS
INODUCI	DIMILIANDIONS

	INCHES	CENTIMETERS
Α	25 13/16	65.6
В	20 1/4	51.4
С	23 7/8	60.6
D	33 3/4-35 1/4	85.7-89.5

MODEL SKUS
JDB1250AWP

NOTES:

- 1. Minimum 32" drain loop, 1/2" inside diameter minimum. Floor drains require a siphon break.
- 2. Connections preferably located toward left side of dishwasher. Care should be taken to route plumbing away from motor and blower (if equipped).
- 3. Electrical and plumbing should meet all local and national codes.
- 4. Electrical and water supplies should enter cabinet opening on the floor, or through the back or side walls, as shown in the shaded area of the drawing.
- 5. When installing dishwasher in or near a corner, allow enough room for door to open without interfering with cabinet drawers or hardware.

Electrical requirements: Adequately wired individual 120V A/C, 60Hz approved electrical circuit. Use required fuse (15 amp) or comparable circuit breaker.